


Lead Free Brass Ball Valve



2 Piece • Full Port • Solder Connection • 600 WOG



S-100NEG

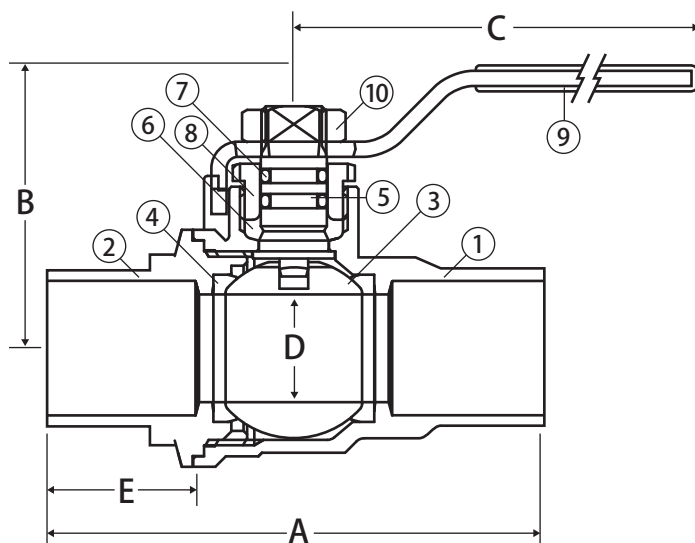

Features


- Dezincification resistant brass alloy
- Triple sealing stem with 2 Viton® o-rings and Teflon® seal
- Blow-out proof stem
- 100% leak tested
- 100% Made in Italy
- Leakproof stem - Lifetime Warranty
- 29 in-Hg vacuum rating
- Wetted surfaces contain less than .25% lead content
- Accessories available

Approvals

- NSF 372
- NSF 61-8
- NSF 61 - Annex G
- MSS SP-110
- ASME/ANSI B16.18

Valve Seat Rating

1/4" - 3/4" 600 WOG, 1" - 2" 500 WOG - 150 WSP

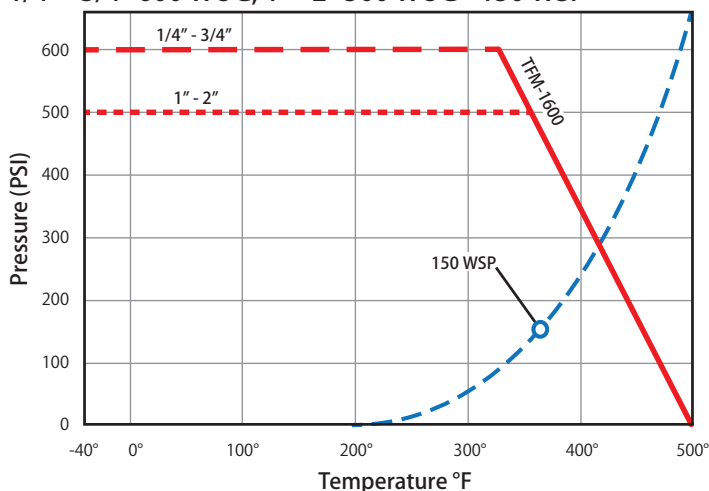

Material Specifications

No.	Part	Materials
1	Body	Lead Free Brass - CW511L
2	End Connection	Lead Free Brass - CW511L
3	Ball	T.E.A. Coated Brass - CW510L
4	Seat (2)	PTFE G300
5	Stem	Lead Free Brass - CW510L
6	Packing	PTFE G300
7	Stem O-ring (2)	FKM
8	Packing Gland	Brass - CW614N
9	Handle	Steel - Geomet® Plated
10	Handle Nut	Steel - Geomet® Plated

Dimensions

Part No.	Size	A	B	C	D	E	Cv
100-803NGDZ	1/2"	2.48	1.56	2.95	0.59	0.51	16.82
100-804NGDZ	3/4"	3.26	2.05	3.74	0.79	0.76	34.80
100-805NGDZ	1"	3.94	2.55	4.75	0.97	0.92	52.20
100-806NGDZ	1-1/4"	4.50	2.66	4.75	1.23	0.98	112.52
100-807NGDZ	1-1/2"	5.07	3.31	6.00	1.49	1.10	174.00
100-808NGDZ	2"	6.22	3.60	6.00	1.99	1.34	255.20