



TANKLESS SIMPLIFIED

Features

- Dezincification Resistant Brass Alloy
- Triple Sealing Stem with 2 FKM O-Rings and Teflon® Seal
- Unique, Single-Turn Operation & 3-Way Ball Design
- Easily Fits Inside Recessed Wall Boxes
- Patented 45° Relief Valve Port
- Threaded, Sweat, Press, & SharkBite™ Connections
- 100% Leak Tested
- 100% Made in Italy
- NSF 61 & NSF 372 Certified



TWV-3W-KIT-G



LEARN MORE


JOMARVALVE.COM



Lead Free Brass Ball Valve

3 Way Ball, Tankless Water Heater Valve Kit, Threaded, Solder, or Press Connections, 600 WOG

TWV-3W-KIT-G



FEATURES


- Unique, T.E.A. Ternary Eco Alloy® Coated 3-Way Style Ball
- 2 FKM O-Rings with Teflon Packing and Packing Nut Guarantees no stem Leaks
- US Patent No. 7,762,280 B2
- 3/4" 200,000 BTU/hr Pressure Relief Valve Included
- 100% Leak Tested
- 100% Made in Italy
- Leakproof Stem - Lifetime Warranty
- Wetted Surfaces Contain Less Than .25% Lead Content
- Dezincification Resistant Brass Alloy

CERTIFICATIONS/APPROVALS

- NSF 372
- NSF 61-8
- NSF 61 - Annex G
- ANSI B1.20.1
- ANSI B1.20.7

VALVE SEAT RATING

600 WOG - 150 WSP

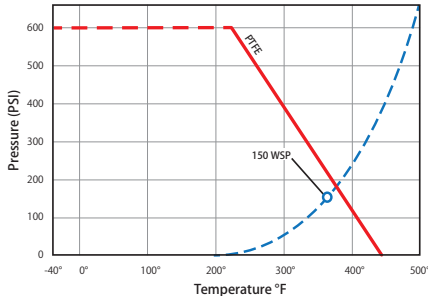

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C27453
2	End Connection	Lead Free Brass - C27453
3	Ball	T.E.A. Coated Brass - C28500
4	Seat (2)	PTFE
5	Stem	Lead Free Brass - C28500
6	Packing	PTFE
7	Stem O-ring (2)	FKM
8	Packing Gland	Brass - C38500
9	Handle	Steel - Geomet® Plated
10	Handle Nut	Steel - Geomet® Plated
11	Union Washer	EPDM
12	Tail Piece	Lead Free Brass - C28500
13	Union Nut	Brass - C37700
14	Tether	PVC
15	Cap	Lead Free Brass - C28500
16	Flat Washer	Buna-N

DIMENSIONS

Part No	Size	A	B	C	D	E	F
810-504G Threaded	Hot	5.11	2.00	3.74	0.66	1.65	1.41
	Cold	3.93	2.00	3.74	0.66	-	1.41
810-514G Solder	Hot	5.35	2.00	3.74	0.66	1.65	1.41
	Cold	4.17	2.00	3.74	0.66	-	1.41
810-524G Press	Hot	5.71	2.00	3.74	0.66	1.65	1.41
	Cold	4.53	2.00	3.74	0.66	-	1.41