


Direct Mount Ball Valve

Lead Free Brass, 2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, Spring Return Handle, 600 WOG

A101-DH

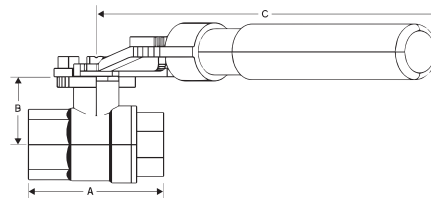

FEATURES


- Dezincification Resistant Brass Alloy
- Blow-Out Proof Stem
- Fail Safe Position
- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content

CERTIFICATIONS/APPROVALS

- NSF 61-8
- NSF 372
- MSS SP-110
- ANSI B1.20.1

VALVE SEAT RATING

600 WOG - 150 WSP

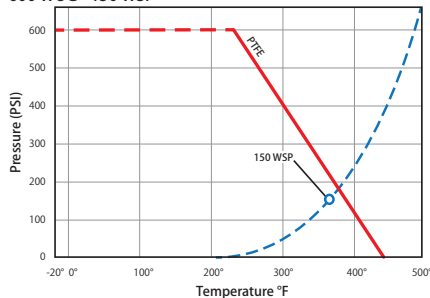

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46500
2	Seat (2)	PTFE
3	Ball	304 Stainless Steel
4	Stem Seat	PTFE
5	Stem	304 Stainless Steel
6	O-Ring (2)	Viton®
7	Screw	Nickel Plated Steel
8	Packing Nut	Nickel Plated Steel - C37700
9	Gasket	Nylon
10	Handle - Dead Man	304 / 301 Stainless Steel
11	End Connection	Lead Free Brass

DIMENSIONS

Part No	Size	A	B	C
A101-12DH	1/2"	2.39	1.14	6.69
A101-34DH	3/4"	2.57	1.28	6.69
A101-1DH	1"	2.97	1.59	8.66
A101-114DH	1-1/4"	3.44	1.82	8.66
A101-112DH	1-1/2"	3.88	2.32	8.66
A101-2DH	2"	4.29	2.62	8.66



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.