


Actuation Accessories

ASV | Four Way Solenoid Valve

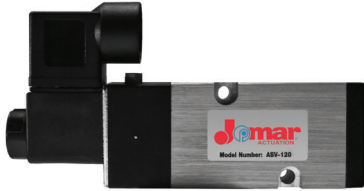

ASV

Features

- Extruded Aluminum Body with NBR Seal
- 120/60/1 Coil with IP 67 Rating
- Manual Override
- 1/4" NPT Exhaust Port
- 1/2" NPT Conduit Connection
- Operating Temp: -40°F to 140°F
- Operating Pressure: 20 - 120 PSI

Options

- 120vac
- 120vac explosion proof
- 24vac
- 24vdc
- 24vac explosion proof
- 24vdc explosion proof
- 240vac
- 12vdc coil

PART NUMBER	DESCRIPTION
SOLENOID VALVES	
ASV-120	120VAC
ASV-120VAC-N7	120VAC EXPLOSION PROOF
ASV61-24VDC	24VDC
ASV-24VDC-N7	24VDC EXPLOSION PROOF
SOLENOID COILS	
ASC-120VAC	120VAC
ASC-120VAC-XP	120VAC EXPLOSION PROOF
ASC-12VDC	12VDC
ASC-240VAC	240VAC
ASC-24VAC	24VAC
ASC-24VDC	24VDC
ASC-24VDC-XP	24VDC EXPLOSION PROOF