


# Lead Free Brass Ball Valve

2 Piece, Full Port, MIP x Solder Connection, Stainless Steel Trim, 600 WOG

## JF-100GMxC

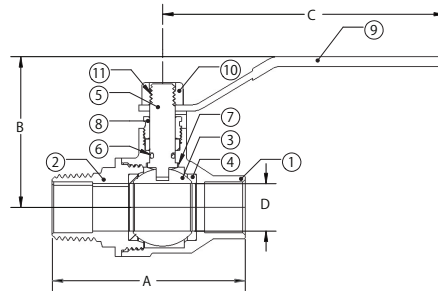

### FEATURES

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Blow-Out Proof Stem
- 100% Leak Tested
- IAPMO Certified - NSF 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Content


### CERTIFICATIONS/APPROVALS

- IAPMO Certified
  - NSF 61-8
  - NSF 372
  - Uniform Plumbing Code (UPC)
    - IAPMO/ANSI Z1157-2014
    - NSF/ANSI 14-2014

MSS SP-110  
ANSI B1.20.1

### VALVE SEAT RATING

600 WOG - 150 WSP

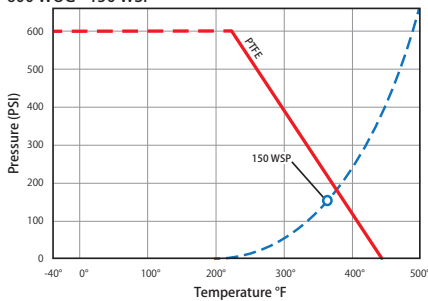

### MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46400
2	End Connection	Lead Free Brass - C46400
3	Ball	304 Stainless Steel
4	Seat (2)	PTFE
5	Stem	304 Stainless Steel
6	Packing	PTFE
7	Stem O-ring	Buna-N
8	Packing Gland	Lead Free Brass - C46400
9	Handle	Steel - Chrome Plated
10	Handle Nut	Steel - Chrome Plated
11	Lock Washer	Steel - Chrome Plated

### DIMENSIONS

Part No	Size	A	B	C	D
100-143G	1/2"	2.4	1.88	3.5	0.59
100-144G	3/4"	3.13	2.165	4.31	0.75