


Lead Free Brass Ball Valve

2 Piece, Full Port, Solder Connection, Stainless Steel Trim, Thermal Expansion Relief, 600 WOG

JF-100RVG SWT

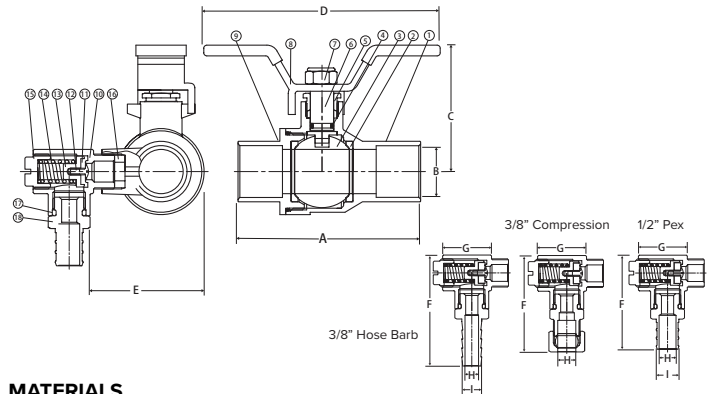

FEATURES


Dezincification Resistant Brass Alloy
Side Discharge
Includes Connections: 3/8" Barb, 1/2" Pex, 3/8" Compression Fittings
Available in 80, 100, 125 PSI
IAPMO Certified - NSF 61 & NSF 372
IAPMO Certified - CSA B125.3 & IGC128
ASTM B828
Wetted Surfaces Contain Less than .25% Lead Content

CERTIFICATIONS/APPROVALS

IAPMO Certified
- ANSI/NSF 61-08
- ANSI/NSF 372
- CSA B125.3
- CSA IGC128
Uniform Plumbing Code (cUPC)
- IAPMO/ANSI Z1157-2014
- NSF/ANSI 14-2014
ANSI B16.18
RoHS Compliant
MSS SP-110

VALVE SEAT RATING

600 WOG - 150 WSP

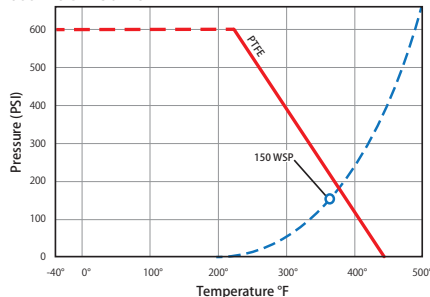

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass
2	Seat	PTFE
3	Ball	Stainless Steel
4	O-Ring	FKM
5	Packing Nut	Lead Free Brass
6	Stem	Stainless Steel
7	Handle Nut	Plated Steel
8	Handle	Plated Steel
9	Cap	Lead Free Brass
10	Interface Body	Lead Free Brass
11	Rubber Washer	FKM
12	Screw	Stainless Steel
13	Plug	Lead Free Brass
14	Spring	Stainless Steel
15	Regulating Joint	Lead Free Brass
16	Rubber Washer	FKM
17	O-Ring	FKM
18	Fitting	Lead Free Brass

DIMENSIONS

Part No	Relief Pressure	A	B	C	D	E
101-080RVSSG	80 PSI	3.09	0.75	2.11	3.94	1.14
101-100RVSSG	100 PSI	3.09	0.75	2.11	3.94	1.14
101-125RVSSG	125 PSI	3.09	0.75	2.11	3.94	1.14

RELIEF CONNECTION DIMENSIONS

Part No	F	G	H	I
3/8" Hose Barb	1.95	1.02	0.28	0.42
3/8" Compression	1.65	1.02	0.38	-
1/2" Pex	1.59	1.02	0.35	0.47