





Lead Free Brass x Galvanized Steel Dielectric Union

Solder x MIP Connection, 250 PSI

DIELECTRIC UNION

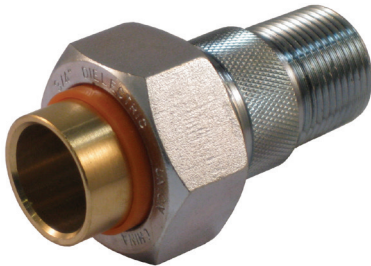

FEATURES

- Dezincification Resistance Brass Alloy
- Prevents Accelerated Corrosion
- Buna Seats: -20°F to 180°F
- Wetted Surfaces Contain Less than .25% Lead Content

CERTIFICATIONS/APPROVALS

- Lead Free Compliant
- ANSI B1.20.1
- ASME/ANSI B16.18
- ASSE 1079

PRESSURE/TEMPERATURE RATING

250 PSI

MATERIALS

| No. | Part | Material |
|-----|-----------------|---------------------|
| 1 | Body | Steel - Zinc Plated |
| 2 | Tail Piece | Lead Free Brass |
| 3 | Union Nut | Steel - Zinc Plated |
| 4 | Dielectric Ring | Nylon 66 |
| 5 | Gasket* | Buna-N |

DIMENSIONS

| Part No | Size | A | B | C |
|--------------|---------------------|------|------|------|
| Solder x MIP | | | | |
| 701-303G | 1/2" SWT x 1/2" MIP | 2.85 | 1.61 | 0.65 |
| 701-304G | 3/4" SWT x 3/4" MIP | 3.01 | 1.83 | 0.79 |
| 701-305G | 3/4" SWT x 1/2" MIP | 2.62 | 1.83 | 0.65 |
| 701-306G | 1" SWT x 1" MIP | 3.18 | 2.15 | 0.86 |

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.