



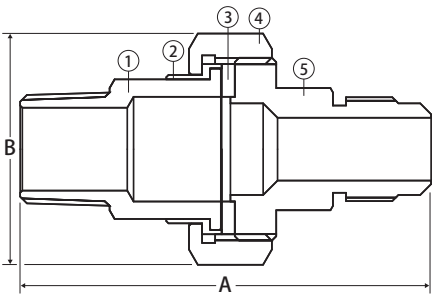

# Liquid Propane Dielectric Union

Brass MIP x Brass Flare Connection, 250 PSI

DIELECTRIC UNION

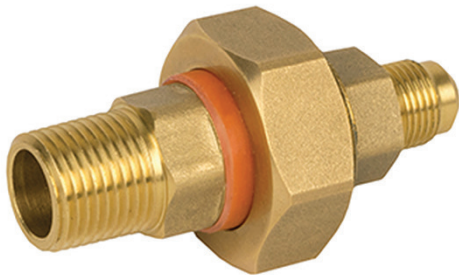

**FEATURES**  
Meets NFPA 58 Dielectric Union Requirement  
For Use in Propane Applications  
Prevents Accelerated Corrosion  
HNBR Seal: 40°F to 180°F

**CERTIFICATIONS/APPROVALS**  
ANSI B1.20.1  
Flare Connection in Accordance  
with NFPA 54/ANSI Z223.1

**PRESSURE/TEMPERATURE RATING**  
250 PSI

MATERIALS		
No.	Part	Material
1	Tail Piece	Brass - 37700
2	O-ring	PE Plastic
3	Gasket	HNBR
4	Nut	Brass - 37700
5	Body	Brass - 37700

DIMENSIONS			
Part No	Size	A	B
703-102	1/2" MIP x 3/8" FL	3.27	1.58
703-103	1/2" MIP x 1/2" FL	3.42	1.58
703-104	1/2" MIP x 5/8" FL	3.54	1.58
704-102	3/4" MIP x 3/8" FL	3.55	1.81
704-103	3/4" MIP x 1/2" FL	3.69	1.81
704-104	3/4" MIP x 5/8" FL	3.72	1.81