


Stainless Steel Ball Valve

2 Piece, Full Port, Threaded Connection, 2000 WOG

T-SS-2000N-FP

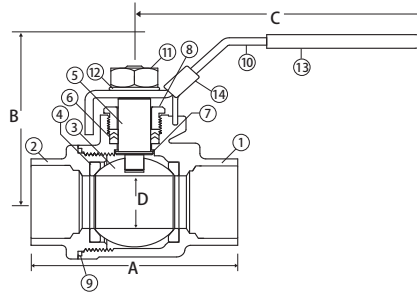

FEATURES

- Solid Ball Construction
- Latch Lock May Be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in.-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content


CERTIFICATIONS/APPROVALS

- CSA Certified
 - CGA 3.16 (125 PSIG) (1/4" - 2")
 - ASME B16.33 (175 PSIG) (1/4" - 2")
- UL Listed
 - MHKZ - Manual Valves
 - YQNZ - Compressed Gas Shut-Off Valves
 - YRBX - Flammable Liquid Shut-Off Valves
 - YRPV - Gas Shut-Off Valves
 - YSDT - LP Gas Shut-Off Valves
 - YQAR - Anhydrous Ammonia Shut-Off Valves

- ANSI B1.20.1
- MSS SP-110
- Meets ISO 15848
- Buy American Act Compliant

VALVE SEAT RATING

1/4" - 1" 2000 WOG, 1-1/4" - 2" 1500 WOG, 2-1/2" - 4" 1000 WOG - 150 WSP

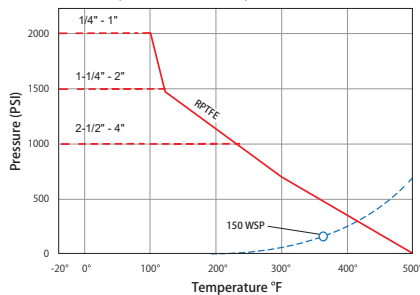

MATERIALS

No.	Part	Material
1	Body	CF8M Stainless Steel
2	End Connection	CF8M Stainless Steel
3	Ball	CF8M Stainless Steel
4	Seat (2)	RPTFE
5	Stem	316 Stainless Steel
6	Packing (2)	RPTFE
7	Stem Seal	PTFE
8	Packing Gland	304 Stainless Steel
9	Body Seal	PTFE
10	Handle	304 Stainless Steel
11	Handle Nut	304 Stainless Steel
12	Lock Washer	304 Stainless Steel
13	Handle Sleeve	PVC
14	Locking Device	304 Stainless Steel

DIMENSIONS

Part No	Size	A	B	C	D
101-941	1/4"	2.38	2.13	4.06	0.46
101-942	3/8"	2.38	2.13	4.06	0.51
101-943	1/2"	2.52	2.23	4.06	0.59
101-944	3/4"	3.03	2.51	4.96	0.79
101-945	1"	3.54	3.02	6.46	0.98
101-946	1-1/4"	3.94	3.26	6.46	1.26
101-947	1-1/2"	4.65	3.76	7.48	1.50
101-948	2"	5.43	4.15	7.48	1.97
101-949	2-1/2"	6.56	5.59	9.72	2.56
101-950	3"	7.60	6.02	9.72	3.15
101-951	4"	10.24	7.18	12.60	3.94

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.