

Lead Free Automatic Balancing Valve



Automatic Flow Limiter, Union, 600 WOG




TAF-BFF

Features

- +/- 5% accuracy
- Two pressure / temperature (PT) ports
- 0.5 GPM is the default flow cartridge selected if not specified
- Direction of flow labeled on valve body

Pressure and Temperature Rating

- 600 WOG
- 325°F Max

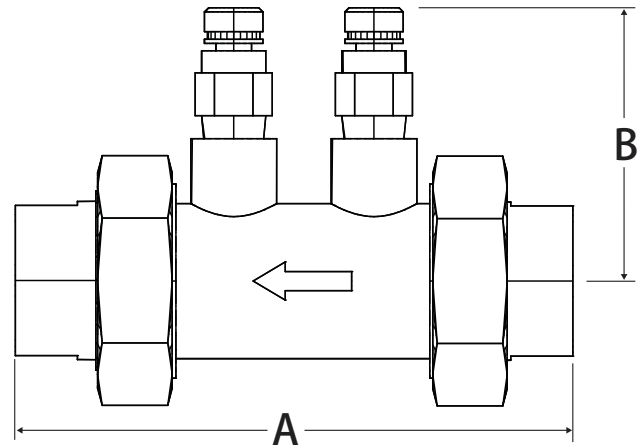

Material Specifications

| Part | Materials |
|-----------------------|--------------------------|
| Body | Lead Free Brass - CW510L |
| Union Nut (2) | Brass - CW617N |
| Tail Piece (2) | Lead Free Brass - CW510L |
| Temperature Test Port | Brass - CW617N |
| Balancing Cartridge | 316 Stainless Steel |

Dimensions & Pricing

| Part No. | Size | A | B |
|----------|------|------|------|
| TAF-BFF | 3/4" | 4.68 | 2.29 |

GPM Ordering Guide

| Cartridge | Pressure Range | GPM | | | | | | | | |
|-----------|----------------|------|-------|-------|-------|------|------|------|------|------|
| | | 0.5 | 1.00 | 2.00 | 3.00 | 4.00 | 4.50 | 6.00 | 7.00 | 8.00 |
| C2-L | 2-32 | 0.5 | 1.00 | 2.00 | 3.00 | 4.00 | 4.50 | 6.00 | 7.00 | 8.00 |
| C2-H | 5-60 | 9.00 | 10.00 | 11.00 | 12.00 | - | - | - | - | - |



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.