


Domestic Hot Water Balancing Valve

RecircSetter™ | Thermostatic Balancing, Variable Set Point, Optional Check Valve, Thermal Disinfection, 150 CWP

TB-130G

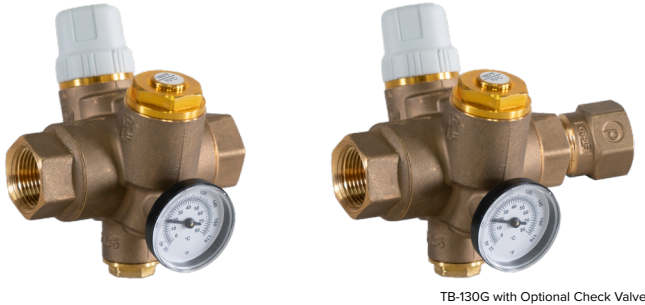

TB-130G with Optional Check Valve

FEATURES

- Dezincification Resistant Brass Alloy
- Variable Temperature Set Point with Protective Cap
- Modulates Flow to Maintain Constant Temperature in Recirculation Loop
- No Balancing Equipment Required
- Drywell with Temperature Gauge Included
- 1/2" NPT Temperature Port (Factory Plugged)
- Optional Check Valve
- Thermal Disinfection Bypass (160°F)
- 100% Made in Italy
- NSF 61 & NSF 372 Certified
- Wetted Surfaces Contain Less than .25% Lead Content
- Accessories Available


CERTIFICATIONS/APPROVALS

NSF/ANSI/CAN 61
NSF/ANSI/CAN 372
Conforms to ANSI B1.20.1

PRESSURE/TEMPERATURE RATING

Max Working Pressure: 232 psi
Max Differential Pressure: 14.5 psi
Max Working Temperature: 194°F
Temperature Setting Range: 95°F - 140°F

C_{vmin} : 0.23
 C_{vmax} : 2.10
 $C_{vdesign}$: 0.53 - 0.59
 $C_{vdisinf}$: 1.21

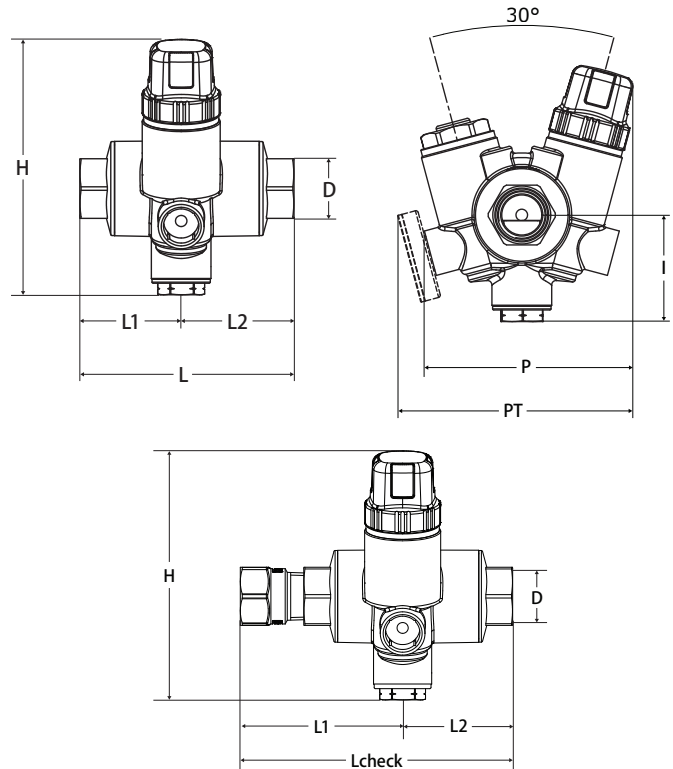


DIMENSIONS

Part No	D	L	L _{check}	L1	L2	H	I	P	PT
180-103G-D	1/2"	3.66	-	1.73	1.93	4.41	1.81	3.58	4.02
180-104G-D	3/4"	3.9	-	1.85	2.05	4.41	1.81	3.58	4.02
*180-103G-D-C	1/2"	-	4.8	2.87	1.93	4.41	1.81	3.58	4.02
*180-104G-D-C	3/4"	-	5.43	3.39	2.05	4.41	1.81	3.58	4.02


*TB-130G with Optional Check Valve

Material Specifications

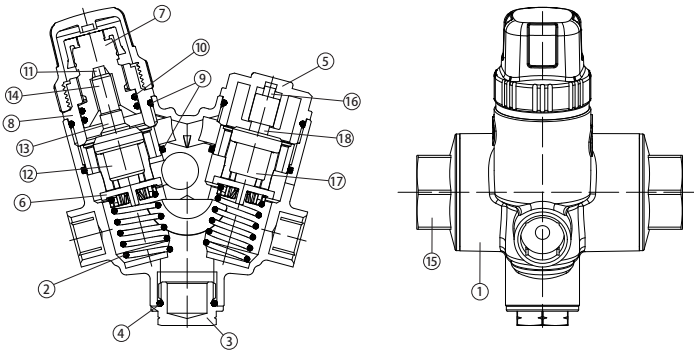



MATERIALS

No.	Part	Material
1	Valve Body	LF DZR Brass C27453
2	Spring	Stainless Steel AISI 302
3	1/2" Plug	LF DZR Brass C27453
4	O-Ring	EPDM
5	Auxiliary Cap	LF DZR Brass C27453
6	Piston	PSU
7	Stem	LF DZR Brass C27453
8	Stem Adapter	LF DZR Brass C27453
9	O-Ring	EPDM
10	O-Ring	EPDM
11	Cartridge Piston	Steel
12	Cartridge Cup	Brass C22000
13	Cartridge Guide	Brass C69300
14	Cartridge Sleeve	EPDM
15	End Connection FNPT	LF DZR Brass C27453
16	Thermal Disinfection Piston	Steel
17	Thermal Disinfection Cup	Brass C22000
18	Thermal Disinfection Guide	Brass C69300



MATERIALS FOR TB-130G CHECK VALVE (OPTIONAL)

No.	Part	Material
1	Body	LF DZR Brass C27453
2	O-Ring	EPDM
3	Check Body	GF Noryl
4	Spring	Stainless Steel AISI 301
5	Check Rod Plunger	GF Noryl
6	Check Lip Seal	EPDM

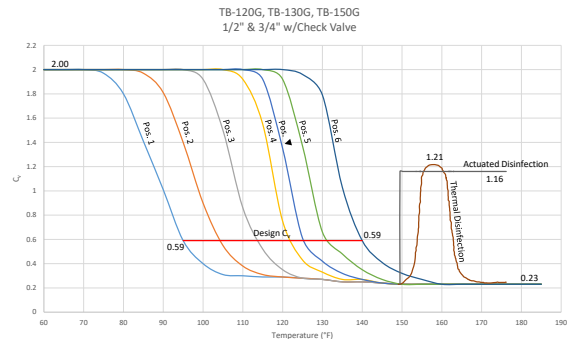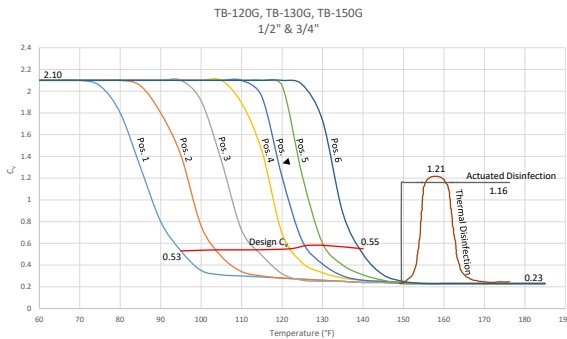

HAND WHEEL SETPOINT TEMPERATURE (°F)										
95°	100°	105°	110°	115°	120°	125°	130°	135°	140°	
1	1.6	2.1	2.7	3.2	3.8	▼ 4.4	4.9	5.5	6	