

Brass Swing Check Valve

Description

Swing-type disc, cast brass, metal to metal seat with screwed cap, check valve.

Features

- 200 PSI rated
- 1/2" - 4" Available
- 1/2" - 2" C x C Available
- Residential and Commercial applications
- NPT on sweat connections

Approvals

- Threaded ends comply with ANSI B1.20.1 and solder ends comply with ANSI B16.18

Warranty

The Company, for a period of one year from the date of shipment, warrants each product or system of its own manufacture to the original purchaser to be free from defects in material and workmanship under normal use, service and maintenance.



Architect/Engineer approval

Job Name _____ Date _____
Model Specified _____ Quantity _____
Variations Specified _____
Customer/Wholesaler _____
Contractor _____
Architect _____

Note: Information subject to change without notice.

Brass Swing Check Valve



Description

Swing-type disc, cast brass, metal to metal seat with screwed cap, check valve.

Dimensions in Inches


Computer Number	Valve Size	A	B
T-501 NPT			
105-103	1/2"	2.13	1.54
105-104	3/4"	2.33	1.62
105-105	1"	2.72	1.77
105-106	1-1/4"	3.11	2.01
105-107	1-1/2"	3.51	2.25
105-108	2"	4.30	2.68
105-109	2-1/2"	5.32	3.35
105-110	3"	6.30	3.86
105-111	4"	7.49	4.53
S-501 Sweat			
105-203	1/2"	2.52	1.54
105-204	3/4"	3.11	1.62
105-205	1"	3.90	1.77
105-206	1-1/4"	4.37	2.01
105-207	1-1/2"	4.96	2.25
105-208	2"	5.99	2.68

Material Specification

Item	Part Name	Material Specifications
1	Cap	Cast Brass
2	Body	Cast Brass
3	Disc	Forged Brass
4	Hinge Pin	Brass
5	Screw	Brass

Pressure Rating

200 WOG

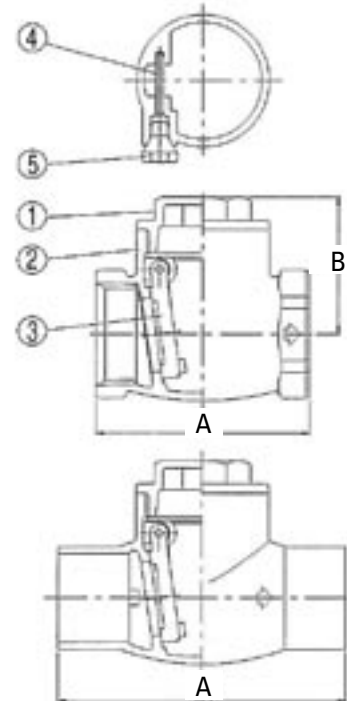

Note: Information subject to change without notice.