

Stainless Steel Ball Valve 3 Piece 4 Bolt • Swing Out Body • Full Port • Threaded x Flanged End Connection • 1000 WOG




FL-SS-1000N-4B




- Type B flange face
- Latch lock may be locked in open or closed positions
- 29 in-Hg vacuum rating
- 100% leak tested
- Wetted surfaces contain less than .25% lead content
- Repair kits available

Valve Seat Rating 1000 WOG - 150 WSP





WARNING: This product can expose you to chemicals including diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and diisononyl phthalate (DINP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

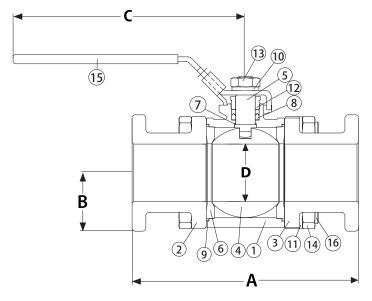

Material Specifications

			•
	No.	Part	Materials
	1	Body	A351-CF8M
	2	Body Cap	A351-CF8M
	3	Square Flange	A351-CF8M
	4	Ball	A351-CF8M
	5	Stem	SS 316
	6	Seat	TFE/RTFE/TFM 1600
	7	Stem Seal	TFE/RTFE/TFM 1600
	8	Stem Packing	TFE/RTFE/Graphite
	9	Union Seal	TFE/RTFE/TFM 1600
	10	Spring Washer	SS 304
	11	Washer	SS 304
	12	Gland	SS 316
	13	Handle Nut	SS 304
	14	Cap Nut	SSS 304
	15	Handle	SS 304
	16	Cap Bolt	SS 304

^{*}Included in repair kit

Dimensions

Part N	o. Size	Α	В	C	D	Torque
500-36	58 2"	7.84	4.25	7.99	1.97	480