


# Lead Free Brass Hose Bibb

## Press Connection, Quarter Turn, 200 WOG

### P-632NKG

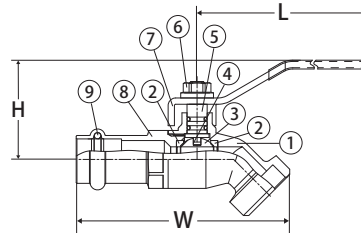

#### FEATURES

- Dezincification Resistant Brass Alloy
- Long Life Positive Shut-Off
- Wetted Surfaces Contain Less than .25% Lead Content

#### CERTIFICATIONS/APPROVALS

- IAPMO Certified
  - NSF/ANSI 372-2020
  - NSF/ANSI/CAN 61-2019
  - Uniform Plumbing Code (cUPC)
    - IAPMO/ANSI Z1157-2014e1 (R2019)
    - NSF/ANSI 14-2018

Press end conforms to IAPMO PS117  
 NH Thread conforms to ANSI B1.20.7

#### VALVE SEAT RATING

200 WOG  
 Max Working Temperature of 200°F

#### MATERIALS

No.	Part	Material
1	Body	Lead Free Brass
2	Seat	PTFE
3	Ball	Lead Free Brass
4	Stem O-Ring	NBR
5	Stem	Brass
6	Handle Nut	Plated Steel
7	Handle	Plated Steel
8	Cap	Lead Free Brass
9	Cap O-Ring	EPDM

#### DIMENSIONS

Part No	Size	W	H	L
201-203G	1/2"	3.35	1.53	3.46
201-204G	3/4"	3.35	1.53	3.46