

Stainless Steel Ball Valve



**3 Piece 4 Bolt • Swing Out Body • Full Port •
Threaded Connection with Drain • 1000 WOG**





T-SS-1000N-4B

Features

- Latch lock may be locked in open or closed positions
- 29 in-Hg vacuum rating
- 100% leak tested
- Wetted surfaces contain less than .25% lead content
- Repair kits available

Valve Seat Rating 1000 WOG - 150 WSP

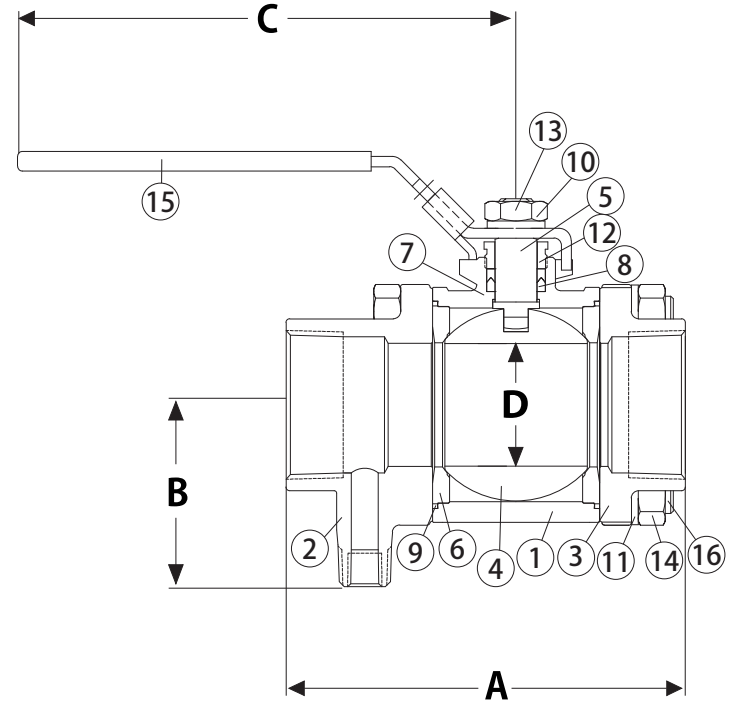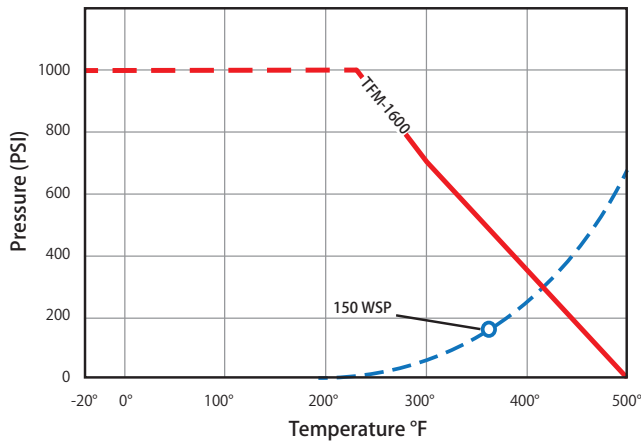

Material Specifications

No.	Part	Materials
1	Body	A351-CF8M
2	Body Cap	A351-CF8M
3	Body Cap	A351-CF8M
4	Ball	A351-CF8M
5	Stem	SS 316
6	Seat	TFE/RTFE/TFM 1600
7	Stem Seal	TFE/RTFE/TFM 1600
8	Stem Packing	TFE/RTFE/Graphite
9	Union Seal	TFE/RTFE/TFM 1600
10	Spring Washer	SS 304
11	Washer	SS 304
12	Gland	SS 316
13	Handle Nut	SS 304
14	Cap Nut	SSS 304
15	Handle	SS 304
16	Cap Bolt	SS 304

*Included in repair kit

Dimensions

Part No.	Size	A	B	C	D	Torque
501-308	2"	6.39	2.91	7.99	1.97	480